




The
Patent
Office



#5

INVESTOR IN PEOPLE



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name in which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

J. Evans

Dated 05 November 1999

CERTIFIED COPY OF
PRIORITY DOCUMENT

THIS PAGE BLANK (USPTO)


**The
Patent
Office**

9
06NOV98 E402866-1 D00314
P01/7700 0.00 - 9824323.1

Patents Act 1977
(Rule 16)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

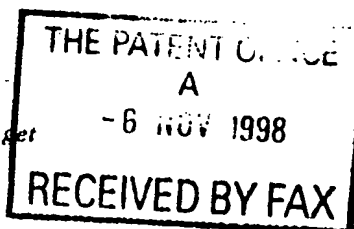

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

P/61683.GBA

2. Patent application number

06 NOV 1998

9824323.1

(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Marconi Communications Ltd
New Century Park
P O Box 53
CV3 1HL

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

751720001

4. Title of the invention

Telecommunications System

5. Name of your agent (if you have one)

Mr. C. F. Hoste

"Address for service" in the United Kingdom to which all correspondence should be sent

GEC Patent Department
Waterhouse Lane
Chelmsford
Essex CM1 2QX

(including the postcode)

Patents ADP number (if you know it)

40527004

If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body
- See note (d)

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document
- Continuation sheets of this form

Description

Claim(s)

Abstract

Drawings(s)

0

17

3

1

6

THE PATENT OFFICE
A
- 6 NOV 1998
RECEIVED BY FAX

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)
Any other documents
(Please specify)

C.F. Hoste - Agent for the Applicants

A.P. Cardus - 01245 275124

12. Name and daytime telephone number of person to contact in the United Kingdom

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

DUPLICATE

1

P/61683a.GBA

Telecommunications Systems

The present invention relates to telecommunications systems such as telephone networks comprising a plurality of interconnected telephone exchanges and communication there-
5 between.

Conventional telephone networks are fully-meshed in that each trunk exchange has a direct connection to every other trunk exchange. Traffic levels in telephone networks are increasing, leading to a continued need to increase the capacity of such networks. To achieve this,
10 exchanges need to be enlarged and new exchanges installed. In fully-meshed networks, a significant number of additional network interconnections are needed with each new exchange, leading to further increases in the number of ports needed per exchange. This results in less efficient networks with costs per unit of traffic increasing.

15 By using the present invention it is possible to provide a more efficient and more easily configurable network.

The present invention provides a telecommunications system comprising one or more nodes and a plurality of telephone exchanges wherein two or more of the telephone exchanges are
20 arranged to communicate with each other via the one or more nodes.

In a preferred embodiment the communication via the one or more nodes is in the form of packets.

In a further embodiment the one or more nodes comprise routers.

In a further embodiment the present invention provides a telecommunications system wherein communication via the one or more routers uses internet protocol (IP).

5

The present invention also provides an adapter for providing the above telephone exchanges with a means of inter-communication of traffic via the one or more nodes wherein the adapter comprises means for converting the traffic between packetised and non-packetised form.

10 Embodiments of the invention will now be described by way of example with reference to the drawings in which:

Figure 1 shows in block diagram form a typical, conventional, large telecommunications network of the prior art;

15 Figure 2 shows the network of Figure 1 with routers according to a first embodiment of the invention;

Figure 3 shows the network of Figure 1 with routers according to a second embodiment of the invention;

Figure 4 shows in block diagram form a typical, conventional, small telecommunications
20 network of the prior art;

Figure 5 shows the network of Figure 4 with routers according to a third embodiment of the invention;

Figure 6 shows the network of Figure 1 partially upgraded with routers according to the first

embodiment of the invention;

Figure 7 shows in block diagram form an adapter according to the present invention;

Figure 8 shows a possible internal organisation of the adapter of Figure 7.

5 Turning to Figure 1 a typical, conventional, large telephone network comprises a number of local exchanges L interconnected via trunk exchanges T. Each local exchange L is connected to two (or more) trunk exchanges T, which are fully-meshed. In current networks this fully-meshed trunk interconnect typically uses mainly PDH transmission.

10 Figure 2 shows the typical, large network of Figure 1 after trunk upgrade according to a first embodiment of the invention. In this embodiment two routers R are shown, although the number may vary in practice. Each router R is connected to every trunk exchange T. Rather than a large number of low bandwidth connections, the trunk interconnect now consists of a few high bandwidth connections.

15

Figure 3 shows the typical, large network after local upgrade. With the addition of some simple multiplexers M, all the local exchanges are directly connected to the routers R. The trunk exchanges (not shown) may still be used to provide regional interconnect and interconnection to non-upgraded exchanges and other networks.

20

Figure 4 shows a typical smaller network. The smaller network has tandems N rather than trunk exchanges, which may have a few customers directly connected. Each local exchange L is connected to several (possibly all) tandems N, there is no interconnection of the tandems.

Figure 5 shows the typical, smaller network of Figure 4 after being upgraded according to a third embodiment of the invention. Routers R are installed, similar to those used to upgrade the large network, interconnecting the local exchanges L, through multiplexers M. The old tandems can then be reused, for example, as local exchanges and points of interconnect to other
5 networks.

The routers R can be installed as a trunk network replacement piecemeal. Figure 6 shows the large network of Figure 1 partially upgraded. Here traffic is carried by a mixture of the old trunk interconnect and new routers R. A number of trunk exchanges T have connection to the
10 routers R and are able to communicate with others so connected via the routers. However not all trunk exchanges T are connected to the routers R at this stage and the old trunk interconnect is still used for communication between exchanges not connected to the routers R and for communication between each such exchange and each of the exchanges connected to the routers R. The number of routers R can be upgraded from one to four or more as further
15 exchanges are connected.

In this way the routers may be extended to eventually connect all existing trunk exchanges.

It may be desirable to move some of the existing transmission over to the router network, to
20 take advantage of the greater efficiency of the routers R compared with the existing meshed PDH, and to overcome a shortage of physical ports on the conventional switches.

Each exchange requires routing data containing information on the way the exchanges are

interconnected within the telecommunications system. Every time an exchange gets connected to the routers R, all the other exchanges that have already been connected to the routers will need to have new routes set up for communication with the newly connected exchange. Re-configuring exchanges in this way every time another exchange is connected via the routers is expensive. A preferred solution is for routing data relating to all exchanges to be loaded into each exchange as it is connected to the routers, but only to enable data relating to routes to those exchanges that have already been so connected.

Hence the implementation of the present invention simplifies the data requirements in exchanges. On installation, every exchange (trunk or local) can have exactly the same network data loaded. This data can be pre-prepared for the whole network with the data for the exchanges connected to the routers being enabled as the network is enhanced. This data includes the network part of the digit decode, which is needed to determine the exchange to handle the call, and the route to be used. The same route number can be used for all exchanges to get to the same far-end exchange. The digit decode requirements of the exchanges would grow to support routing to all local exchanges.

The existing trunk exchanges, could still be used, e.g. as regional trunk exchanges (DJSUs), allowing reduction or elimination of sideways routes between local exchanges. If at any time these regional trunk exchanges are overloaded, the traffic can be handled in the main trunk (router) network.

Extension of the routers to directly interconnect local exchanges may be implemented once

there is a sufficiently developed provision of trunk routers to provide the interworking.

When expanded to connect the local exchanges, enhancement may be necessary to carry the signalling directly over the IP connections. One way of interworking to local exchanges and
5 other networks is to have simple interworking routers, which are effectively minimalist exchanges. These could be the existing trunk exchanges.

The adapters may use ATM, IP, or virtually any packet-based network. In many large-scale networks, IP is carried over ATM and a similar scheme could be used in the network of the
10 invention. Alternatively IP could be carried over point-to-point protocol (PPP) over SDH or SONET, or any other appropriate interface. In the network of the invention, data is sent across the network to an address determined by the adapter. No call processing is necessary within the ATM, IP or equivalent packet networks. In effect the packet (e.g. ATM or IP) network forms a transport multiplex layer below that of the individual PSTN circuits. The packet (e.g.
15 ATM or IP) network transport multiplex provides an alternative to the rigid PDH transmission network that is more flexible in the way it multiplexes channels. Conceptually the interconnected adapters may be thought of as providing an intermediate layer between the PSTN circuits on top and the transport multiplex underneath.

20 When operating over an IP network, the adapter could use the same AAL2 multiplex structure that it would use over ATM or it could use similar multiplex structures to those used by VoIP.

AAL2 has been designed to carry low rate, short length packets in delay sensitive applications

in a bandwidth efficient way. The AAL2 multiplexes many separate low speed streams such as voice, data and signalling together on a single IP packet. AAL2 has been standardised in ITU-T I.363.2. AAL2 is an efficient way of multiplexing low-speed circuits together and is suitable for use over IP in the network of the present invention.

5

Voice traffic is given a high priority. This ensures that the delay variation would be well constrained, thus limiting the amount of additional buffering required to remove the effect of cell delay variation at the receiver.

- 10 The use of VoIP over ATM to provide the interconnection of adapters over the PTO network essentially uses a subset of the general VoIP transport as performed by any conventional VoIP gateway.

The proposed solution supports carrying voice as AAL1 or AAL2 in configurations to suit
15 different networks at different stages of evolution.

Voice may be carried across the network of the present invention in more than one way. Where the adapters communicate using IP native-mode, voice may be packetised in a similar way to AAL2 for sending over the IP network, or packetised as voice over IP (VoIP). Voice
20 over AAL2 may be implemented using the ITU-T I.366.2 "AAL type 2 service specific convergence sub-layer for trunking" speech multiplexing and encoding principles. This is efficient and supports transition to low bit-rate coding schemes, transcoding, etc.

Fundamentally the adapter working over IP (IP adapter) functions in exactly the same way as the adapter working over ATM (ATM adapter). As there is no call set up mechanism in the IP network, an adapter sending traffic over IP has to assume that the transmission capability it needs is always available. As with the ATM adapter, there is a need to ensure that the IP voice traffic is given a high enough priority to enable an adequate quality of service to be achieved. In order not to adversely affect the quality of service seen by the PSTN network, the IP network delay for voice traffic must be relatively low. This means that there must be a means to effectively prioritise voice traffic. The adapter needs to process voice traffic with a higher priority than data traffic in order to prevent unacceptable delay to voice traffic.

10

This may be achieved in a number of ways, for example if IP is carried via ATM where prioritising of voice traffic is supported. Operation over a private (totally-dedicated network) where voice traffic does not have to share the network with data traffic allows an adequate quality of service to be easily achieved by keeping delays to an acceptable level.

15

The invention may be implemented over IP native-mode which is capable of carrying some non-voice traffic but care is necessary to ensure that it does not affect the low delay requirements of the voice traffic.

20 In order to minimise delay when using IP, the length of IP packets carrying voice may be shortened. However, as each packet contains its own header bytes, this is wasteful of the network bandwidth due to the increased proportion of header information to useful data sent. Advantageously a number of different circuits may be multiplexed into a single, large packet.

In this way delay is still reduced without increasing the proportion of header information to data sent.

Use of AAL2 carrying a number of different channels multiplexed together can provide low
5 delay (as in the case of short packets) without excessive amounts of header information.

A single network according to the present invention could use ATM to provide traffic to a first destination whilst at the same time using IP over ATM to provide traffic to a different destination. Hence PSTN circuits could be carried across the PTO network using either ATM
10 or IP over ATM on a route by route basis. In doing this a relationship is set up between individual PSTN circuits and routes across the PTO network.

Telephone calls include traditional hand-set to hand-set calls but also calls initiated or answered by machine including computers. Such calls may contain voice and/or data from e.g.
15 modems or facsimile equipment. Handling of such calls include call set-up, routing and clear-down. No call handling is required in the central routers. All the call handling is handled in the PSTN, using existing protocols with all the existing features.

To achieve network resilience in the presence of equipment failure, it is desirable to have at
20 least two, and preferably more central nodes so that if one node fails the network would still be able to work via the other nodes. Here the term "node" is used to indicate a cross-connect, router, or other suitable packet-based switch. In an IP based network this would require a plurality of truly independent IP routers which were geographically separated and

10

P/61683a.GBA

independently controlled and managed. They would also need to be resilient against unauthorised intrusion and hacking.

Between each pair of exchanges in an IP based PTO network, a Logical Route would be established, that corresponds to all the active calls between that pair of exchanges. This Logical Route is dynamic in nature and the bandwidth of the Logical Route changes to match the changing demand as existing calls terminate and new calls start.

In a preferred embodiment of the present invention, each trunk/local exchange has an STM1 (155M) connection to each router, carrying one Logical Route per destination exchange. For most local exchanges these 155M connections can be shared between several exchanges, as detailed below. The Logical Route can grow or shrink as necessary: the total quantity of traffic is only limited by the capacity of the transmission to carry it. As traffic patterns change, Logical Routes may grow or shrink on a dynamic basis: no configuration is necessary.

15

The exchanges communicate using existing SS7 protocols, however there is an option (that is necessary when it is extended to local exchanges) to carry the MTP layer 3 over the Logical Route that connects each exchange, thus eliminating the need for any other signalling hardware.

20

Further bandwidth savings may be achieved if only active PSTN circuits (i.e. those carrying information) are packetised. This requires a busy/idle timeslot map to be carried in an end to end control channel using spare capacity within the IP Logical Routes. This technique allows

the mapping to be changed dynamically and in a similar way to that set out in detail in patent number GB 2276518 in the name of GPT Limited. Optional echo cancellation may also be provided.

- 5 Optional signalling transfer point (STP) function to handle SS7 signalling may be provided. This feature will extract redundant data (Level 2 interframe fill) from the SS7 signalling stream.

- Optional modem (fax) detection may be provided. Low speed modems are not bandwidth
10 efficient. In particular, many connections, e.g. fax calls, are essentially unidirectional. This optional feature will detect such calls and convert the modem signals to baseband data for packetisation into IP, taking advantage of the fact that communication across IP can be asymmetric. Thus further bandwidth savings can be achieved.

- 15 Although this has been described in relation to improved trunk networks, the present invention could also be deployed into many other fields for both public and private networks.

- Similarly the present invention has application to leased lines within public networks. Leased lines are often under-utilised, resulting in idle timeslots being carried across the network. The
20 use of the present invention, will allow the network operator to only transport the active channels without degrading the service presented to the end user.

The present invention provides for straightforward enhancement to support traffic growth

wherein the majority of the routing data needed by the PTO exchanges is identical. This allows operators to add to and evolve current networks as and when enhancements to performance or capacity are required.

- 5 For interfacing with sources of non-packetised traffic an adapter is provided, see Figure 7. The adapter functions to convert traffic for sending to the routers into packets and to re-convert packets received from the routers to un-packetised form. In one embodiment the adapter provides interworking between a PSTN trunk (G.703/G.704) and an IP domain to allow IP to be used to provide an efficient and flexible interconnect between exchanges by using variable
- 10 bandwidth Logical Routes.

For interfacing with STM networks, the adapter provides interworking between IP and STM, with preferably one adapter for each route via the routers. These adapters perform interworking between 2M bit/s PCM traffic and IP and also provide a means to connect

15 signalling directly with each of the other local exchanges. These adapters communicate with each of the processor clusters as most of the signalling traffic passes through them.

We now consider the adapter construction in more detail. Referring to Figure 8 by way of example, each adapter unit comprises a housing with a PSU, a common card and up to 4 PCM

20 cards, although more could be added. Each PCM card could handle up to 16 PCMs, the common card has an STM1 interface, an Ethernet interface and a controller for the PCM cards. Each exchange could typically need 4 adapters in this embodiment and these could preferably be mounted two per shelf of the exchange.

The routers operate under PSTN control and provide no control processing themselves. Advantageously a small number of cross links are provided between the main routers, to provide some flexibility after major transmission network outages. These would only be brought into use when a pair of local exchanges have no common accessible trunk routers (a
5 very rare occurrence).

To control the routing and use of circuits, the exchange's call processing system (CPS), sends mapping information to the adapter function at the start and end of each call. At the start of each call, the mapping message gives the association between the PCM circuit and the PSTN
10 side with the route and circuit on the logical side. For ATM based PTO the route would be a VP or a VC, for IP based PTO the route would be the Logical Route to the destination exchange, the mapping message may also indicate the type of call, so that appropriate compression can be used. At the end of the call the CPS function will send another message to cancel the mapping function.

15

A processor interconnect handles the signalling traffic, the mapping messages from CPS and general management. A suitable interface to use here is Ethernet as it allows the interface to be fairly open for use on other platforms if necessary.

20 The hardware of the PCM termination could support both E1 and T1 or be dedicated to either data rate.

14

P/61683a.GBA

The adapters also exchange status information with each other to ensure that each is operational and to exchange and pass on traffic-blocking information. Periodically and when necessary (for example because of a status change) each adapter should send a cell to each far end adapter. This cell contains three elements:

5

1. The adapter receiver status (i.e. whether the adapter is happy with what it is receiving from the far end adapters);
2. A hold indication that, if set, should cause the far end adapter to stop the flow of new traffic to that adapter;
3. Status information on the PCMs to the exchange (i.e. reflecting which PCM/circuits can be used).

10

15 When an adapter receives a check cell, it reacts as follows:

1. If the far is not happy, it should force clear all calls and hold that route busy (but still send its own check cells);
2. If the far end requests a hold, send a hold to the associated exchange;
3. If the far end ceases to request a hold clear the condition (the adapter may delay reacting to a change of state to prevent the network oscillating);

20

4. If the far end has PCM failures, reflect these on to the alarm indication signal (AIS) of its transmitted PCMs.

The Control protocol between the call processing and the adapter units is implemented as an application programming interface (API). This API covers the setting up and breaking down of switching associations, and optionally management (e.g. failure and configuration management).

Management of the adapter includes managing the equipment, configuring it and handling any appropriate statistics. Management is preferably achieved through the exchange or, when the adapter is being used as a standalone device, a Simple Network Management Protocol (SNMP) interface would be appropriate for it to be managed by third party management systems. Alternatively a standalone adapter could be managed through the SDH, for example by using the Equipment Management Operations System (EMOS) particularly when the adapter is closely associated with transmission equipment. Thus, depending on where and how the adapter is being used, different management solutions are necessary.

When the adapter is being used as standalone equipment, a SNMP management interface over the Ethernet control port will be appropriate. This will be controlled by a Managed Information Base (MIB) which should be published. The data model necessary for these applications may differ significantly depending upon the type of exchange used. Flexibility is essential to allow for the addition of functionality such as transcoding, packing algorithms and data rate change. When the adapter is deployed along with SDH transmission, it may be

16

P/61683a GBA

appropriate to manage it through EMOS and the rest of the SDH. This could be through an Ethernet port, through the DCC of the STM1, or through the IP.

In principle all the traffic could be handled by a single router, but this is likely to be
5 unacceptable in practice for availability reasons.

There will preferably be at least two routers to allow for catastrophic failure. However even with two it will be necessary to have a very high level of redundancy with alternative routing for the transmission to these routers. With four routers there is a good level of built-in
10 network redundancy, without the cost being too high. Each should preferably be dimensioned such that any two could handle the normal peak traffic loads of the entire network.

For maximum availability suitably diversely routed transmission should be arranged to the routers with each router on an independent site.

15

The basic architecture would work with any of the following combinations:

Two routers connected over two diverse routes and using transmission protection; three routers over two diverse routes using transmission protection or three routers with three diverse routes
20 without transmission protection. Four routers over two diverse routes without using transmission protection; four routers over two diverse routes using transmission protection and six routers connected via two to three diverse routes without transmission protection. Obviously the numbers above could be varied by the skilled worker depending on the

requirements concerning resilience to failure and cost.

Each adapter would need at least one IP address for routing traffic across the network. Each adapter may have additional addresses for other purposes.

5

The arrangement described above, using IP, can bring benefits in the form of transmission saving, a dynamic network, data simplification and switch port saving.

Transmission saving results from the use of large units (e.g STM1 rather than 2Mbit/s such as
10 VC12) which only has to be routed to a far-end adapter via one of the central nodes (e.g. ATM cross-connect or IP router). In many cases these large transmission units may be part empty thus allowing lower priority data services to be carried. This results in a much more efficient use of transmission than in traditional, directly- connected networks.

15 By dynamic network is meant that traffic patterns can change on a rapid (e.g. minute-by - minute) basis without the need for complex load balancing or for guessing future traffic loads on particular routes. This renders the network efficient and easy to manage.

Data simplification results from being able to use the same routing and network data in all
20 exchanges. This data is also simpler, reflecting the simpler structure of the PTO network.

The number of switch ports required in exchanges can be reduced due to the removal of the physical mesh interconnection.

CLAIMS

1. A telecommunications system comprising one or more nodes and a plurality of telephone exchanges wherein two or more of the telephone exchanges are arranged to communicate with each other via the one or more nodes.
2. The telecommunications system of Claim 1 wherein communication via the one or more nodes is in the form of packets.
3. The telecommunications system of Claim 2 wherein the one or more nodes comprise routers.
4. The telecommunications system of Claim 3 wherein communication via the one or more routers uses internet protocol (IP).
5. The telecommunications system of any one of the above claims, wherein at least some of the telephone exchanges arranged to communicate with each other via the one or more nodes are trunk exchanges.
6. The telecommunications system of any one of the above claims, wherein at least some of the telephone exchanges arranged to communicate with each other via the one or more nodes are local exchanges.
7. The telecommunications system of any one of the above claims being arranged to handle telephone calls wherein all call handling in the system takes place outside of the one or more nodes.
8. The telecommunications system of Claim 5 wherein each of the trunk exchanges has a direct link to each of the one or more nodes.
9. The telecommunications system of Claim 6 as dependant from Claim 5 wherein communication between the local exchanges and the trunk exchanges uses ATM.

10. The telephone system of any above claim wherein each of the two or more telephone exchanges comprise routing data relating to communication with all other exchanges in the telecommunications system and wherein the routing data is partially or wholly enabled.
11. The telecommunications system of Claim 10 wherein only that part of the routing data in a particular exchange relating to communication between that exchange and other exchanges with which that exchange is arranged to communicate via the one or more nodes is enabled.
12. The telecommunications system of any of Claims 1 to 11 comprising means for carrying voice traffic as ATM Adaptation Layer 1 (AAL1) or ATM Adaptation Layer 2 (AAL2).
13. The telecommunications system of any one of Claims 1 to 11 comprising means for carrying voice traffic as voice over IP (VoIP).
14. An adapter for providing the telephone exchanges of any above claim with a means of inter-communication of traffic via the one or more nodes wherein the adapter comprises means for converting the traffic between packetised and non-packetised form.
15. The adapter of Claim 14 comprising means for providing interworking between synchronous transfer mode (STM) and IP domains.
16. The adapter of any one of Claims 14 or 15 comprising means for detection of modem traffic.
17. The adapter of Claim 16 comprises means for converting a detected modem signal to baseband data for packetisation into IP.
18. The adapter of Claim 14 is which the traffic to be packetised comprises PSTN

circuits and the adapter is arranged to only packetise active PSTN circuits.

19. The adapter of Claim 18 arranged to communicate information on which PSTN circuits are not packetised using spare capacity within an IP logical route.
20. The adapter of any one of Claims 14 to 19 comprising means for compression of voice traffic.
21. A telecommunications system substantially as described with reference to and as illustrated in figures 2 and 6 of the drawings.
22. A telecommunications systems substantially as described with reference to and as illustrated in figure 3 of the drawings
23. A telecommunications system substantially as described with reference to and as illustrated in figure 5 of the drawings.
24. An adapter substantially as described with reference to and as illustrated in figures 7 and 8 of the drawings.

21

P/61683a.GBA

ABSTRACT

A telecommunications system comprising one or more cross -connects and a plurality of telephone exchanges wherein two or more of the telephone exchanges are arranged to
5 communicate with each other via the one or more routers and an adapter for providing the telephone exchanges with a means of inter-communication via the one or more routers wherein the adapter converts traffic between packetised and non-packetised form.

THIS PAGE BLANK (USPTO)

SHEET 1 OF 6

P/61683

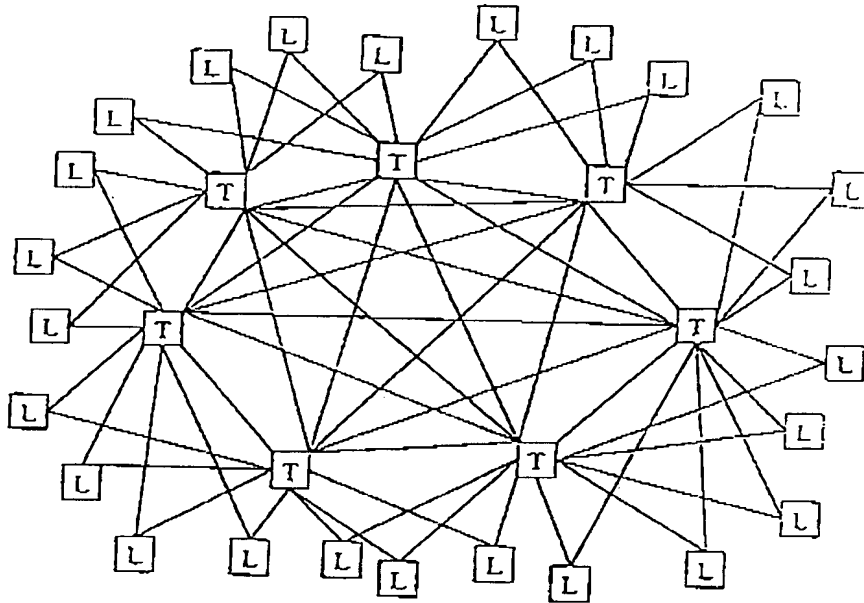


Figure 1

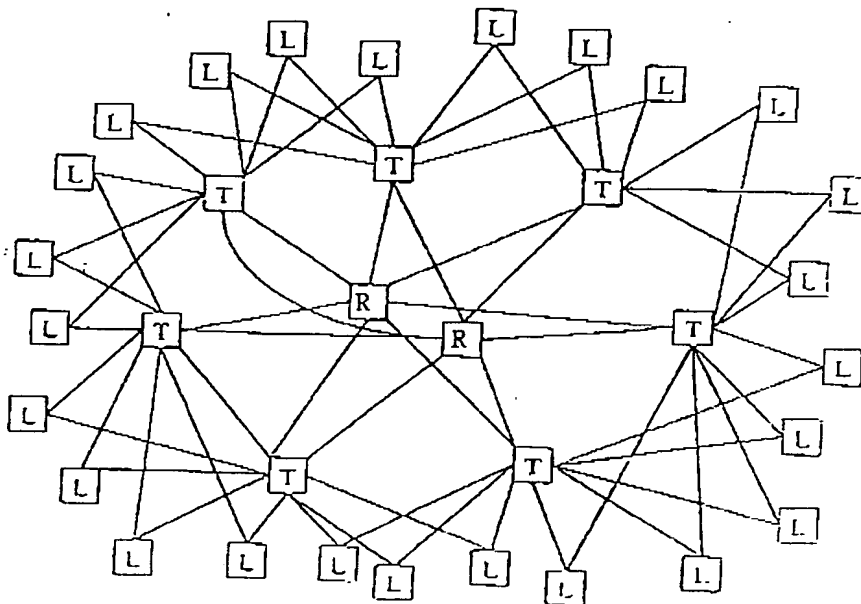


Figure 2

THIS PAGE BLANK (USPTO)

SHEET 2 OF 6

P/61683

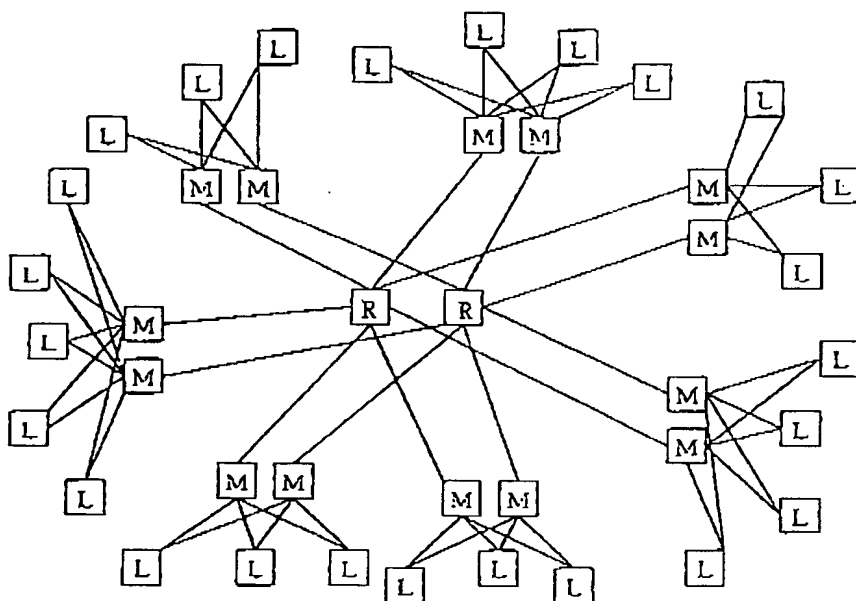


Figure 3

THIS PAGE BLANK (USPTO)

SHEET 3 OF 6

P/61683

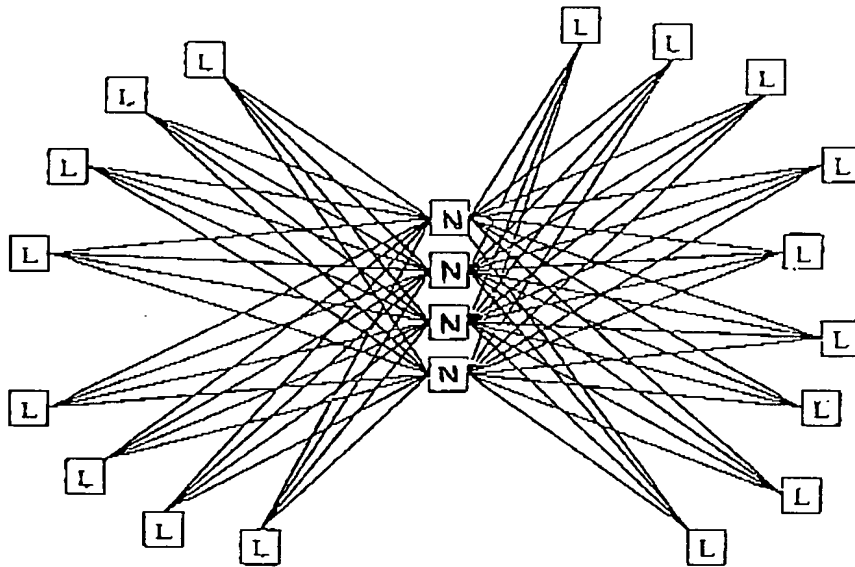


Figure 4

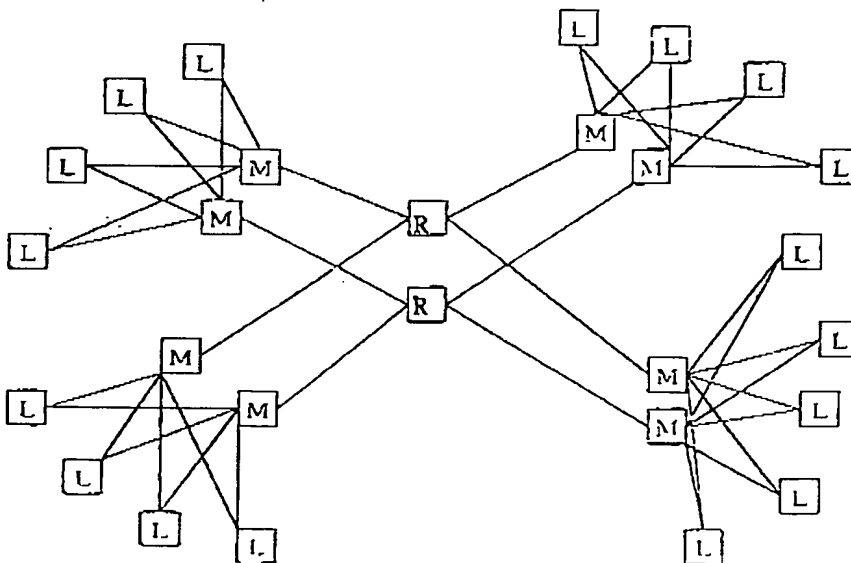


Figure 5

THIS PAGE BLANK (USPTO)

SHEET 4 OF 6

P/61683

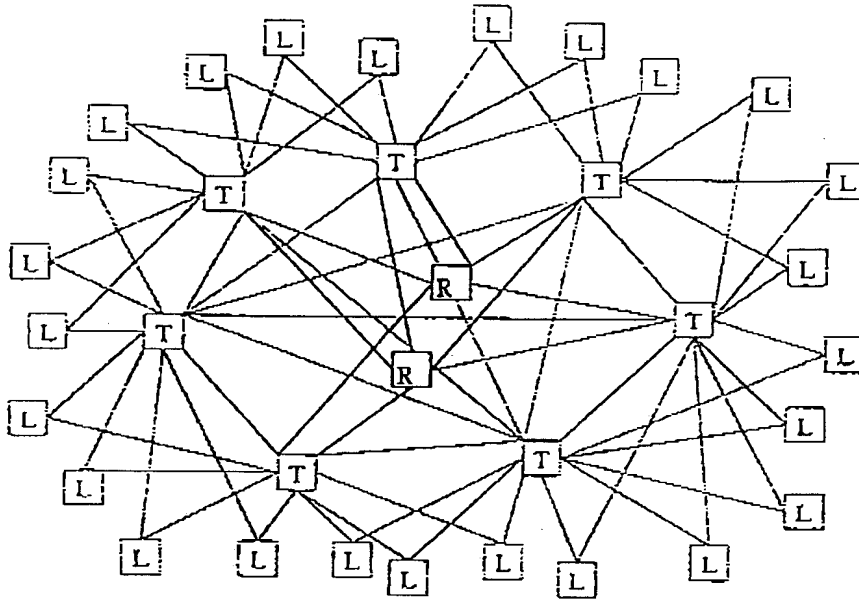


Figure 6

THIS PAGE BLANK (USPTO)

SHEET 5 OF 6

P/61683

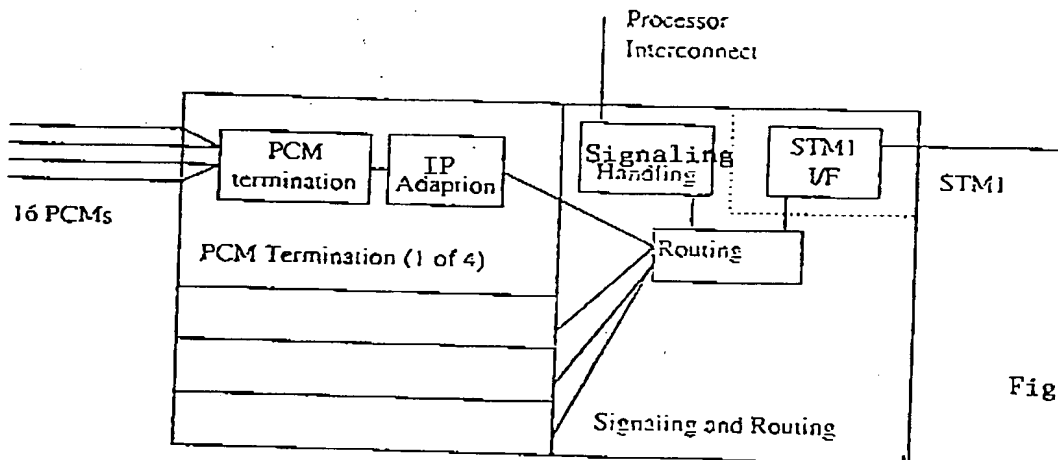


Figure 7

THIS PAGE BLANK (USPTO)

SHEET 6 OF 6

P/61683

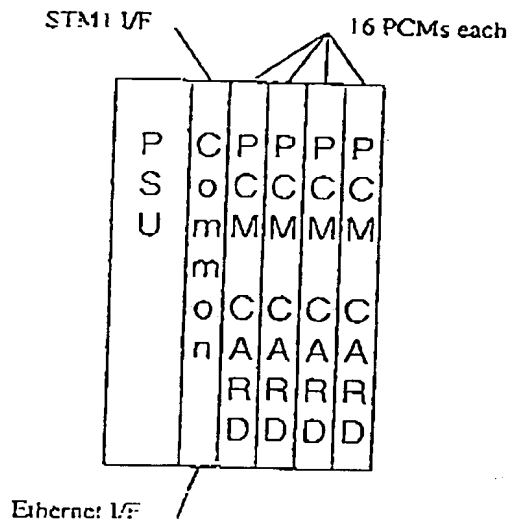


Figure 8

THIS PAGE BLANK (USPTO)